



Code Enforcement Office
735 Utica Street, P.O. Box 394, DeRuyter NY 13052
• Cell: 315-400-2823 • Office: 315-367-1353
• Thursday 9:00 AM - Noon

Permit # _____
Fee \$/Date Pd _____
Date Approved _____
Approved by _____

Solid Fuel Burning Appliances and Metal Chimneys Permit Application

**** A solid fuel-burning appliance shall not share a common flue with a working fireplace nor with another solid fuel-burning appliance.**

Town of DeRuyter Site

Address _____

Owner Information

Name _____

**Mailing
Address** _____

E-Mail _____

Phone # Cell (_____) _____ W(_____) _____

Contractor Information

Name _____

**Mailing
Address** _____

E-Mail _____

Phone # Cell (_____) _____ W(_____) _____

Stove Name _____ ; **Model** _____

Test Label _____ ; **Estimated Cost \$** _____

Check all that apply:

- Stove with label and installation instructions
- New Manufactured Metal Chimney
- Used stove with no label or installation instructions
- Heatilator

Instructions

1. Fill out application
2. Install appliances according to manufacturer's instructions and clearance guidelines
3. If a used appliance, install with minimum clearances provided below
4. Call this office for an inspection

Masonry	
Flue Size:	
Thimble Size:	
Footing Size:	

Metal Piping			
Wall:	Single	Double	Triple
Clean-out door:	Yes	No	
Height Above Roof Line:			

The undersigned certifies that the above statements and all accompanying information are true to the best of their knowledge and belief. The owner of this structure and the undersigned agree to conform to all applicable laws of the town and state, and believe the work proposed to be in compliance with all zoning regulations.


_____ (Print Name of Owner or Authorized Agent)

_____ (Signature of Owner or Authorized Agent)

_____ Date

All solid fuel burning appliances must be installed into an approved chimney, except where manufacturer's specifications allow otherwise. The vent connector pipe (single wall) must have a minimum of 18" clearance to combustibles. Some double-wall connector pipe maybe used to reduce the clearance (Check manufacturer's specifications).

All new manufactured metal chimney systems must have 2" clearance to combustibles and must have a height of 2' higher than the roof ridge. If the chimney is located further than 10' from the ridge, it must be a least 3' higher than the penetration through the roof and 2' higher than the horizontal line of roof intersection. (See Diagram)

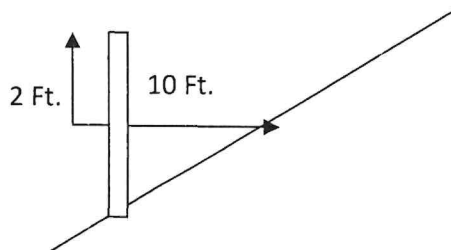

All solid fuel burning appliances with label and installation instructions showing proper clearances to combustibles must be installed according to manufacturer's specifications. Please have these available for review by the building inspector.

In the absence of this documentation, the stove must be installed according to the following table:

Used Solid Fuel Burning Appliances

	Top	Front	Back	Sides
Clearance to combustibles	36"	36"	36"	36"
Clearance to non-combustible wall protection with 1' air space			18"	18"
Concrete/masonry			6"	6"
Non-combustible floor protection (3/4" millboard min.)		18"	12"	12"

For Office Use Only

Inspected On _____

Stove Name _____

Location _____

Approval of Building Official _____ Date _____